

PIP Irrigation



ASTM D2241
ASTM D1784 Cell Class 12454

Gasket: ASTM F477
Joint ASTM D3139

1700 S. Lincoln St., Siloam Springs, AR 72761

Markets



Irrigation


Description

Available Pipe Sizes

SDR-51 8", 10", 12", 15", 18"

Nominal Laying Length = 22 feet (Laying length tolerances are in accordance with AWWA and CSA Standards)

Available Colors



White

IPS Pressure Pipe

80 psi SDR-51

Product Standard: ASTM D2241


Pipe Compound: ASTMD1784 Cell Class 12454

Gasket: ASTM F477

Integral Bell Joint: ASTM D3139



Nominal Laying Length; 22 feet
(Laying length tolerances with AWWA)

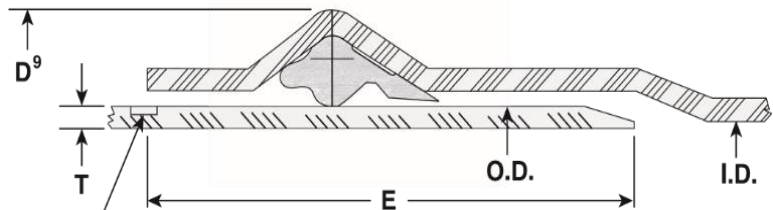

Assembly Mark

- I.D. Inside Diameter
- O.D. Outside Diameter
- T. Minimum Wall Thickness
- D9 Bell Outside Diameter
- E. Distance between Assembly Mark and the end of the spigot.

SDR51

80 psi @ 73°F - PVC 1120 Meets ASTM D2241

Size	Average OD	Nominal ID	Min Wall	Bell Depth	Bell OD	Insertion depth	Weight per foot	Pallet footage	order units	FT Truck
8"	8.160	7.820	0.160	4.500	9.12	4-1/4"	2.662	396	3	6,336
10"	10.200	9.776	0.200	5.375	11.35	5"	4.167	330	4	3,960
12"	12.240	11.731	0.240	5.375	13.39	5"	6.002	176	3	2,816
15"	15.300	14.658	0.300	6.250	16.75	5-3/4"	9.384	66	2	1,584
18"	18.701	17.918	0.366	6.250	20.44	5-3/4"	14.130	66	4	1,100

Customer Service 1-800-643-3470

This Information may have updates. Please visit: jetstreampipes.com for all updated information.

THIS PRODUCT IS MADE IN AMERICA

Printed 2021