

IPS Pipe Pressure BE

PRESSURE-RATED Solvent Weld PVC PIPE



ASTM D2241
ASTM D1784 Cell Class 12454 | Joint ASTM D3139
ANSI/NSF 14 Uniform Plumbing code

1700 S. Lincoln St., Siloam Springs, AR 72761

Markets



Potable



Irrigation



Reclaim



Sewer

Description

Available Pipe Sizes

SDR13.5 1/2"
SDR21 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3", 4", 5", 6", 8", 10", 12"
SDR26 1-1/4", 1-1/2", 2", 2-1/2", 3", 4", 6", 8", 10", 12"

Available Colors



White




Green



Purple

IPS Pressure Pipe

315 psi	SDR13.5
200 psi	SDR21
160 psi	SDR26

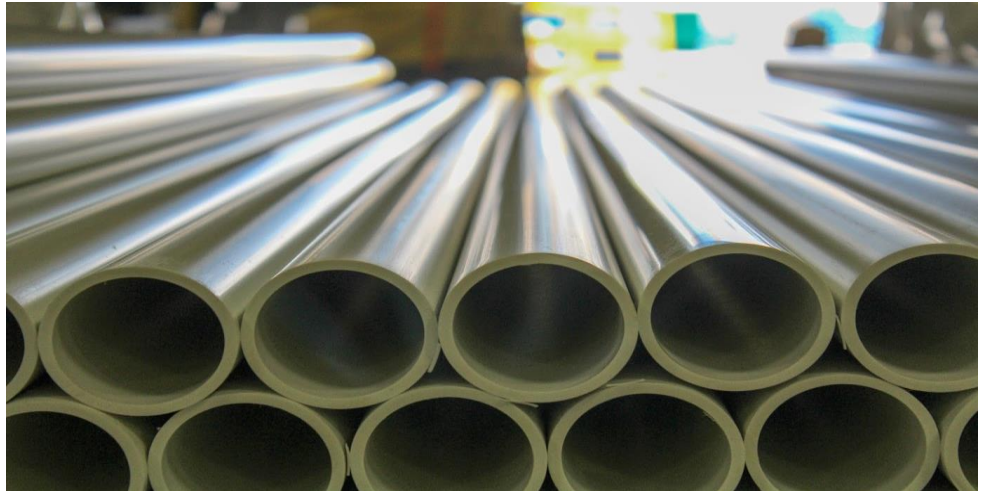

Product Standard: ASTM D2241

Pipe Compound: ASTM D1784 Cell Class 12454

Integral Bell Joint: ASTM D3139

Certifications:

ANSI/NSF 14,

Nominal Laying Length; 20 feet


(Laying length tolerances with AWWA)

10 feet lengths are available upon request

Installation:

UniBell Installation guide for PVC Pressure Pipe

Other:

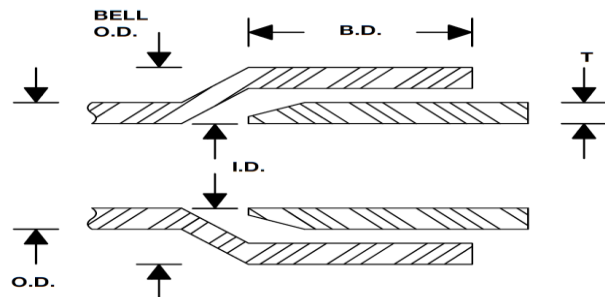

I.D. Inside Diameter
O.D. Outside Diameter
T Minimum Wall Thickness
BELL O.D. Bell Outside Diameter
B.D. Bell Depth

This Information may have updates. Please visit: jetstreampipes.com for all updated information.

THIS PRODUCT IS MADE IN AMERICA

Customer Service 1-800-643-3470

Printed 2021

Solvent Weld Class Pipe



SDR26 Class 160 Solvent Weld

Pressure ratings area: 160 psi and meets ASTM D2241 and ANSI/NSF 14

Size	Average OD	Nominal ID	Min Wall	Bell Depth	Bell OD	Welgh per foot	Pallet footage	order units	FT Truck
1-1/4"	1.660	1.512	0.064	2.500	1.850	0.217	5620	2	7,200
1-1/2"	1.900	1.734	0.073	3.375	2.560	0.291	4060	2	14,400
2"	2.375	2.173	0.091	3.750	3.060	0.447	2800	2	7,200
2-1/2"	2.875	2.635	0.110	4.125	3.795	0.649	1740	2	4,000
3"	3.500	3.210	0.135	4.500	4.535	0.960	1200	2	2,240
4"	4.500	4.134	0.173	5.625	5.700	1.571	720	2	17,280
6"	6.625	6.084	0.255	6.875	8.150	3.428	600	2	7,200

SDR21 Class 200 Solvent Weld

Pressure ratings area: 200 psi and meets ASTM D2241 and ANSI/NSF 14

Size	Average OD	Nominal ID	Min Wall	Bell Depth	Bell OD	Welgh per foot	Pallet footage	order units	FT Truck
3/4"	1.050	0.930	0.990	2-1/8"	1.178	0.127	6000	1	
1"	1.315	1.189	0.063	2-1/4"	1.465	0.168	8000	2	
1-1/4"	1.660	1.502	0.079	2-1/2"	1.860	0.261	5620	2	
1-1/2"	1.900	1.700	0.090	3.375	2.560	0.350	4060	2	14,400
2"	2.375	2.129	0.113	3.750	3.060	0.541	2800	2	7,200
2-1/2"	2.875	2.581	0.137	4.125	3.795	0.790	1740	2	4,000
3"	3.500	3.146	0.167	4.500	4.535	1.165	1200	2	2,240
4"	4.500	4.046	0.214	5.625	5.700	1.928	720	2	17,280
6"	6.625	5.955	0.316	6.875	8.150	4.213	600	2	7,200

SDR13.5 Class 315 Solvent Weld

Pressure ratings area: 315 psi and meets ASTM D2241 and ANSI/NSF 14

Size	Average OD	Nominal ID	Min Wall	Bell Depth	Bell OD	Welgh per foot	Pallet footage	order units	FT Truck
1/2"	0.840	0.778	0.062			0.102	9600	1	460,800



This Information may have updates. Please visit: jetstreampipes.com for all updated information.

Customer Service 1-800-643-3470

THIS PRODUCT IS MADE IN AMERICA

Printed 2021